


# CABLE LÁTIGO DE SEGURIDAD

## S0823-99-LA T


Simple Resorte

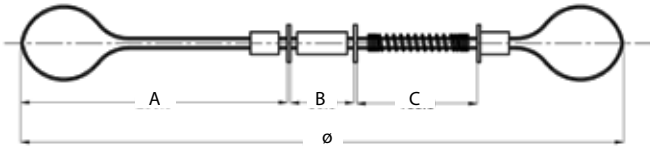

	S0823-99-LAT-02-1	S0823-99-LAT-04-1
A (mm)	230	450
B (mm)	30	50
C (mm)	160	310
L (mm)	500	950
ø cable	1/8"	1/4"
ø int. manguera	1/8" a 1 1/4"	1 1/2" a 3"
carga max. (kgs.)	440	1775

APLICACION: Inmovilización de seguridad de mangueras conectadas a equipos fijos.

Doble Resorte

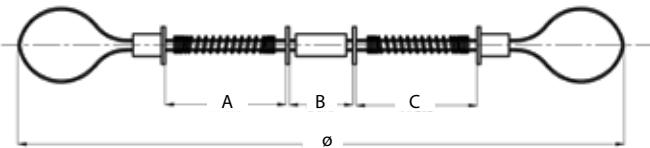

	S0823-99-LAT-02-2	S0823-99-LAT-04-2
A (mm)	170	320
B (mm)	30	50
C (mm)	170	320
L (mm)	510	950
ø cable	1/8"	1/4"
ø int. manguera	1/8" a 1 1/4"	1 1/2" a 3"
carga máx. (kgs.)	440	1775

APLICACION: Inmovilización de seguridad de 2 mangueras conectadas entre sí.

INSTALACIÓN: Los látigos deben instalarse en forma bien estirada.



INSTALACIÓN INCORRECTA



INSTALACIÓN CORRECTA

